

# IMAGE COMPRESSION USING LIFTING SCHEME

*Tilak Mukherjee, Pranab Goswami, Bidyut Das*

*Haldia Institute of Technology, Haldia, West Bengal, India*

**Abstract-** Image compression has become one of the most important disciplines in electronics because of the ever growing popularity and usage of the internet and multimedia systems combined with the high requirements of the bandwidth and storage space. The increasing volume of data generated by some medical imaging modalities which justifies the use of different compression techniques to decrease the storage space and enhance efficiency of transfer the images over the network for access to electronic patient records. Here we are presented an effective algorithm to compress and to reconstruct gray scale image and communications in medical image. Various image compression algorithms exist in today's commercial market. In this, we are introducing lifting scheme based Haar wavelet transform. The Haar wavelet is famous for its simplicity and speed of computation. Computation of the scaling coefficients requires adding two samples values and dividing by two. Calculation of the wavelet coefficients requires subtracting two samples values and dividing by two.

**Keywords** – Lifting Scheme, Bi-orthogonal, Haar wavelet, IWT

## I. INTRODUCTION

Lifting scheme was developed for the construction of biorthogonal wavelets. The main feature of the lifting scheme is that all constructions are derived in the spatial domain. It does not require complex mathematical calculations that are required in traditional methods. Lifting scheme is simplest and efficient algorithm to calculate wavelet transforms [1-2]. It does not depend on Fourier transforms. Lifting scheme is used to generate second- generation wavelets, which are not necessarily translation and dilation of one particular function. It was started as a method to improve a given discrete wavelet transforms to obtain specific properties. Later it became an efficient algorithm to calculate any wavelet transform as a sequence of simple lifting steps. Digital signals are usually a sequence of integer numbers, while wavelet transforms result in floating point numbers. For an efficient reversible implementation, it is of great impor-

tance to have a transform algorithm that converts integers to integers. Fortunately, a lifting step can be modified to operate on integers, while preserving the reversibility. Thus, the lifting scheme became a method to implement reversible integer wavelet transforms. Constructing wavelets using lifting scheme consists of three steps: The first step is split phase that split data into odd and even sets. The second step is predicting step, in which odd set is predicted from even set. Predict phase ensures polynomial cancellation in high pass. The third step is update phase that will update even set using wavelet coefficient to calculate scaling function. Update stage ensures preservation of moments in low pass [3].

## II. WHY LIFTING SCHEME

We have used lifting scheme of wavelet transform for the digital compression because lifting scheme is having following advantages over conventional wavelet transform technique.

- It allows a faster implementation of the wavelet transform. It requires half number of computations as compare to traditional convolution based discrete wavelet transform. This is very attractive for real time low power applications.
- The lifting scheme allows a fully in-place calculation of the wavelet transform. No auxiliary memory is needed and the original image can be replaced with its wavelet transform.
- Possible to implement reversible integer wavelet transforms. In conventional scheme it involves floating point operations, which introduces rounding errors due to floating point arithmetic. While in case of lifting scheme perfect reconstruction as is possible for lossless compression. It is easier to store and process integer numbers compared to floating point numbers.
- Easier to understand and implement.
- It can be used for irregular sampling also.

### III. LIFTING SCHEME BASED ON HAAR WAVELET TRANSFORM

Alfred Haar introduced the first wavelet systems in the year

1910. Wavelet systems of the Haar have been generalized to higher order dimension and rank. Two types of coefficients are obtained from the wavelet transform. Scaling coefficients are obtained by averaging two adjacent samples. These scaling coefficients represent a coarse approximation of the speech. Wavelet coefficients are obtained from the subtraction of two adjacent

samples. Wavelet coefficients contain the fine details of the speech signal. The Haar wavelet is famous for its simplicity and speed of computation. Computation of the scaling coefficients requires adding two samples values and dividing by two. Calculation of the wavelet coefficients requires subtracting two samples values and dividing by two. The inverse transform simply requires subtraction and addition. Using logical shifts to perform division eliminates the need for a complex divide unit. Furthermore, implementing a logical shift in hardware requires much less power and space than an arithmetic logic unit (ALU). Given the computational requirements, the Haar wavelet is a simple and easy to implement transform. Computational simplicity makes the Haar transform a perfect choice for an initial design implementation.

Let us consider a simple example of Haar wavelet: Let us consider that we have a discrete sequence  $f(x)$  which is obtained by sampling continuous signal such as speech signal. Consider two neighboring samples  $X$  and  $Y$  of this sequence. These two samples show strong correlation. Haar transform will replace value of  $X$  and  $Y$  by Average and difference:

$$a = (X + Y) / 2 \quad (1)$$

$$d = Y - X \quad (2)$$

Simple inverse Haar transform can be used calculate

original value of sample  $X$  and  $Y$ :

$$X = (a - d) / 2 \quad (3)$$

$$Y = (a + d) / 2 \quad (4)$$

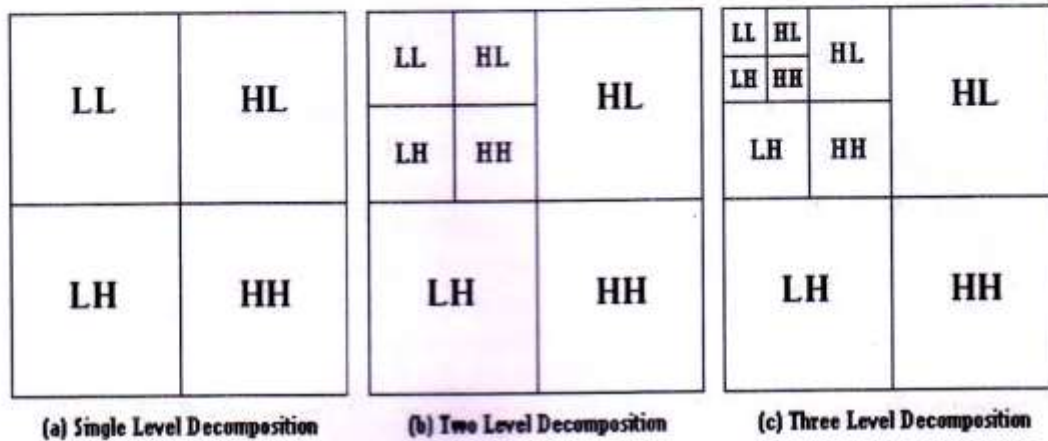


Figure 1: Pyramidal Decomposition of an Image

Figure 1 shows the process involved in wavelet filter sub band decomposition. The sub bands are labeled as LL, HL, LH and HH respectively [3-4].

- LL-Represents approximation content of the image resulting from low pass filtering in both horizontal and vertical directions.
- HL- Represents vertical details resulting from vertical low pass filtering and horizontal high pass filtering.
- LH-Horizontal details resulting from vertical high pass filtering and horizontal low pass filtering.
- HH-Represents diagonal image details resulting from high pass filtering both vertically and horizontally.

#### IV. INTEGER WAVELET TRANSFORM

In wavelet Digital speech signal is a sequence of integer samples; hence speech compression algorithms should work with integers. Apart from speech compression, there are many applications like image compression, image processing etc. require integer wavelet transform because of nature

of input data is integer samples. In addition to this the storage and encoding of integer numbers is easier compared to floating point numbers. Filter bank algorithm of wavelet transform work with floating point numbers even though input values actually are integer, carrying out filtering operations on these numbers will transform them in rational or real numbers because the filter coefficients need not be integers. To obtain an efficient implementation of the discrete wavelet transform, it is of great practical importance that the wavelet transform is represented by a set of integers. Because if we store wavelet coefficients as a floating point

values it requires 32 bits per coefficients. This is not reasonable in some applications like speech compression. Hence wavelet coefficients are rounded to convert it into integer number for efficient encoding and storage. Because of this rounding process, the original signal cannot be used to calculate original value of sample X and Y.

be reconstructed from its transform without an error. This is the reason for not getting loss-less speech compression in the filter bank technique. In wavelet compression using decomposition, the sub band image is further split into four groups and the approximation content is again decomposed further into four smaller sub bands.[4] Here detailed contents of the image are highly neglected resulting in poor compression performance due to significant information loss.

### V. IMPLEMENTATION

In the IWT implementation, rounding operation introduces non linearity in each step. Proper choice of the best factorization of polyphase matrix of  $h(z)$  and  $g(z)$  has to be done. The popular criteria are: Method I: Minimally nonlinear iterated graphic function so as to reduce the error norm. It is good

for (9, 7) and (5, 7) filter structures. It yields a unique solution.

Method II-Closest to one normalization constant method. It can provide multiple solutions.

Method III-Minimum number of lifting steps-It is the flexible algorithm to reduce the number of lifting steps which means reduced number of rounding operations. So finally it results is less non linear transforms, and has a direct implication in both software and hardware implementation in terms of speed, memory and chip area [9].

### VI. EXPERIMENTAL RESULTS

Using MATLAB 2010, simulations are performed using a sample image "Hills" in the GUI interface as shown in Fig.2. Other sample images are also taken and then compression performance parameters are observed in Table 1.

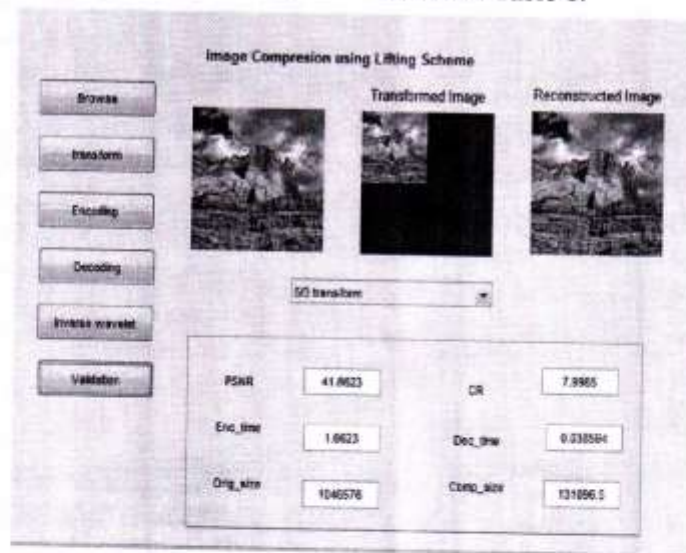


Figure 2: Simulation result of Image "Hills"

The compression ratio is significantly improved. The transformed and the reconstructed image both are considered. These simulation results are summarized in Table 1. Conform to the fact that implement-

ing the LS improves the compression parameters like PSNR, CR, encoding and decoding. LS invariably represent a distinguished choice for the implementation of lossless compression capability in terms of rate-

distortion performance.

Table 1, shows the compression ratio improvement for the image whose simulation results have been performed. The encoding and decoding time is significantly improved to speed up the compression process in this Lifting Scheme. The 5/3 transform corresponds to the fact that high pass

filter has five filter taps and low pass filter has three taps in this experiment, which can be modified according to the experiment designer. Best factorization exhibit IWT performance very close to DWT for low bit rates only [10]. As the bit rate grows the nonlinear effects of integer transform are dominant with respect to the quantization error.

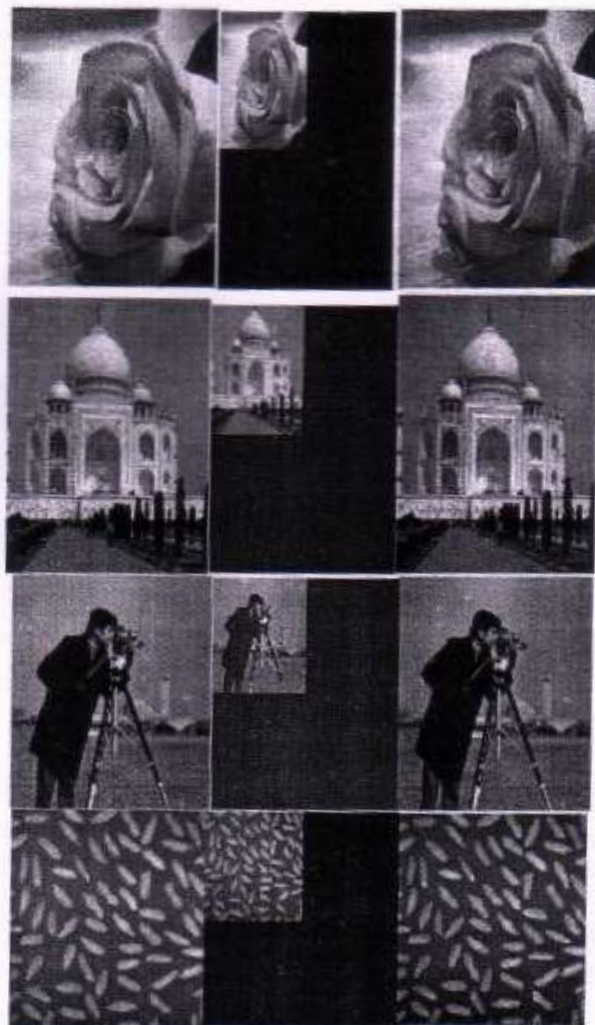


Figure 3: Original image, transformed Image and Reconstructed Image

TABLE 1. Performance parameters of different image

Image	EncodingTime(sec)	DecodingTime(sec)	CompressionRatio (CR)
Rose	2.1977	0.082277	8.91373
Taj Mahal	1.5665	0.062376	8.71131
Camera Man	1.7791	0.080736	7.97836
Rice	1.9339	0.070633	8.90938

## VII. CONCLUSIONS

In this paper, superior performance of lossless image compression model using the Lifting Scheme is analyzed and the simulation results agree to such efficient compression model. It has the potential to speed up the splitting and decomposition process by exploiting the features of both low pass and high pass filter taps. In software based video conferencing, Internet browsing, multispectral remote sensing, HDTV and real time image compression systems where speed is a deciding factor, this

reversible compression model can work out suitably, without the need of temporary arrays in the calculation steps. The implementation of LS along with IWT definitely improves the PSNR and compression ratio significantly, projecting it to be a more effective and robust compression technique in image processing areas using medical, seismic, satellite, manuscript and heavily edited images. Stemming from these results, VLSI architectures will be projected in future scope for the IWT that are capable of attaining very high frame rates with moderate gate complexity.

## REFERENCES

- [1] Cebraail Taskin, Serdar Kursat, „Overview of Image Compression Approaches” IEEE 3rd International Conference on Digital Telecommunications, 2008.
- [2] C.Lin,Bo Zhang and Yuan F.Zheng, ”Packed Integer Wavelet Transform constructed by Lifting scheme” International Journal of Computers ,Information Technology and Engineering, June 2008.
- [3] Amir Averbuch,Danny Lazar and Moshe Israeli, “Image Compression using wavelet transform and multiresolution analysis” IEEE Transactions on Imge Processing Vol.5 No.1, January 1996.
- [4] Geert Uytterhoeven,Dirk Roose and Adhemar Bultheel, ”Integer wavelet transforms using the Lifting Scheme” CSCC 1999 Proceedings.
- [5] Wade Spiras, “Lossless Image Compression via the Lifting Scheme”, University of Central Florida, November 2005.
- [6] C.Jain,Vijay Chaudhary, Kapil Jain, Saurabh Karsoliya, “Performance analysis of Integer wavelet Transform for Image Compression”, IEEE 2011.
- [7] L. M. Po and W. C. Ma, A Novel Four-Step Search Algorithm for Fast Block Motion Estimation, EEE Trans. Circuits Syst. Video Technol. vol. 6, no. 3, pp. 313-317, Jun. 1996.
- [8] R. Li, B. Zeng and M. L. Liou, A new three-step search algorithm for block motion estimation, Circuits and systems for video Technology, IEEE Transaction. August 2002.
- [9] S. Zhu and K.-K. Ma, A new diamond search algorithm for fast block matching motion estimation, in Proc. Int. Conf. Inform., Commun., Signal Process., Singapore, Sept. 912, 1997, pp. 292296.
- [10] S. Choi and J. Woods, Motion-compensated 3-D subband coding of video, IEEE Trans. Image Process, vol. 8, pp. 156-167, Feb. 1999.
- [11] F. Li , N. Ling and S. Chiappari, The effect of MCTF update step on coding efficiency for H.264/AVC scalable extension a theoretical approach, Proc. Pictures Coding Symposium, Beijing, China, Apr. 2006.
- [12] Cho-Chun Cheng, Guan-Ju Peng and Wen-Liang Hwang, Subband Weighting with Pixel Connectivity for 3-D Wavelet Coding, IEEE Transactions on Image Processing, volume 18, number 1, pages 52-62, January 2009.